

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.


As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.



The
Patent
Office

GB 99/4144

09/868262

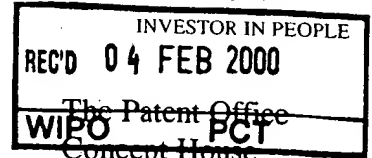


Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

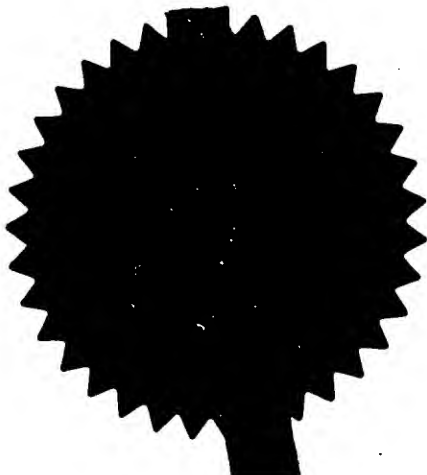

Signed

W. Evans

Dated

25 JAN 2000


**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office
Cardiff Road
Newport
Gwent NP9 1RH

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



17 DEC 1998

1. Your reference

100001/VRD/MNE

2. Patent application number

(The Patent Office will fill in this part)

9922723.3

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Cambridge Display Technology Limited
Greenwich House
Madingley Rise, Madingley Road
Cambridge, CB3 0HJ

Patents ADP number (*if you know it*)

If the applicant is a corporate body, give the country/state of its incorporation

United Kingdom

6166441006m3-

4. Title of the invention

ORGANIC LIGHT-EMITTING DEVICES

5. Name of your agent (*if you have one*)

Page White & Farrer

"Address for service" in the United Kingdom to which all correspondence should be sent (*including the postcode*)

54 Doughty Street
London WC1N 2LS

Patents ADP number (*if you know it*)

1255003

If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country

Priority application number
(*if you know it*)

Date of filing
(*day / month / year*)

United Kingdom 9827827.8

17 December 1998

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Priority application number
(*if you know it*)

Date of filing
(*day / month / year*)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (*Answer 'Yes' if:*

YES

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body
- See note (d))

Patents Form 1/77

9. Enter the number of sheets ny of the
following items you are filing with this form.
Do not count copies of the same document

Continuation sheets of this form 0

Description 7

Claim(s) 4

Abstract 1

Drawing(s) 2

10. If you are also filing any of the following,
state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right
to grant of a patent (Patents Form 7/77)

Request for preliminary examination
and search (Patents Form 9/77)

Request for substantive examination
(Patents Form 10/77)

Any other documents
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

PAGE WHITE & FARRER

PAGE WHITE & FARRER

Date

17 September 99

12. Name and daytime telephone number of
person to contact in the United Kingdom

M.N. EVANS
0171-831-7929

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*

ORGANIC LIGHT-EMITTING DEVICES

This invention relates to organic light-emitting devices (OLEDs).

Organic light-emitting devices such as described in US Patent No. 5,247,190 or in US Patent No. 4,539,507, the contents of which are incorporated herein by reference, have great potential for use in various display applications. According to one method, an OLED is fabricated by coating a glass or plastic substrate with a transparent first electrode (anode) such as indium tin oxide (ITO). At least one layer of a thin film of an electroluminescent organic material is then deposited prior to a final layer which is a film of a second electrode (cathode) which is typically a metal or alloy.

From the point of view of electron-injecting properties, a layer of a metal having a low work function such as calcium or an alloy containing a metal having a low work function are the preferred materials for the cathode. However, it is an intrinsic property of such low work function elements that they are very prone to reactions with reactive ambient species such as oxygen or moisture. Such reactions detrimentally affect the electron-injecting properties of the cathode causing the formation of non-emitting black spots with a consequent degradation in device performance.

It is therefore an aim of the present invention to provide an organic light-emitting device which is less prone to the formation of non-emitting black spots and therefore displays improved resistance to performance degradation.

It is another aim of the present invention to provide a method of producing a protective cap for an electrode of an organic light-emissive device which minimizes damage to the underlying organic layers.

According to one aspect of the present invention, there is provided an organic light-emitting device comprising at least one layer of a light-emissive organic

material interposed between a first electrode and a second electrode, at least one of the first and second electrodes comprising one or more electrode layers on the light-emissive material; wherein the organic light-emitting device further has a stack comprising an inert barrier layer and at least one gettering layer interposed between the outermost electrode layer and the inert barrier layer for absorbing moisture and oxygen.

The advantages of this aspect of the present invention are particularly pronounced when the electrode upon which the stack is formed comprises at least one layer deposited by vacuum evaporation.

The inert barrier layer serves to minimize the entry of reactive species into the device, and the gettering layer serves to absorb any traces of reactive species which manage to somehow permeate through the inert barrier layer.

The inert barrier layer is preferably a layer of an inorganic dielectric material preferably selected from the group consisting of AlN, Al₂O₃, SiO₂ and Si₃N₄, and preferably has a thickness in the range of 0.01 to 10 microns, further preferably in the range of 1 to 10 microns. The inert barrier layer is preferably deposited by a sputtering technique to provide a pinhole-free layer.

The gettering layer is preferably a layer of a material which displays high reactivity towards moisture and oxygen such as Li, Ca, Ba or Cs, or an alloy of the same such as LiAl, or a hygroscopic oxide such as BaO. It preferably has a thickness in the range of 0.01 to 5 microns. Calcium is a particularly preferred material for the gettering layer. The gettering layer may be deposited by a sputtering technique to provide a pinhole-free layer. Alternatively, it may be deposited by a vacuum evaporation technique.

According to another aspect of the present invention, there is provided an organic light-emitting device comprising a layer of light-emissive organic material interposed between a first electrode and a second electrode, at least one of the first

and second electrodes comprising one or more electrode layers on the layer of light-emissive organic material for injecting charge carriers into the light-emissive organic material, wherein the organic light-emitting device further comprises a layer of dielectric material on the surface of the outermost electrode layer remote from the layer of light-emissive organic material.

The advantages of this aspect of the present invention are also particularly pronounced when the electrode upon which the dielectric layer or layers is formed comprises at least one layer deposited by vacuum evaporation.

In one embodiment of the present invention, the organic light-emitting device further comprises a second layer of dielectric material on the first layer of dielectric material, the thickness of the dielectric layers being selected so as to reduce mechanical stress on the electrode .

Suitable dielectric materials for each of the first and second layers include inorganic dielectric materials, preferably SiO , AlN , SiO_2 , Si_3N_4 and Al_2O_3 . The thickness of each of the dielectric layers is preferably in the range of 0.01 to 10 microns, preferably in the range of 1 to 10 microns.

Each of the dielectric layers may be deposited by a sputtering technique or by a vacuum evaporation technique..

According to a third aspect of the present invention, there is provided a method of providing a protective cap on a first electrode of an organic light-emitting device comprising at least one layer of a light-emissive organic material between first and second electrodes for injecting charge carriers into the light-emissive organic material, said method comprising the step of forming a first layer of a dielectric material on the surface of the first electrode opposite the layer of light-emissive organic material by a vacuum evaporation technique.

The first electrode typically comprises one or more metal layers with the dielectric layer being formed directly on the surface of the outermost metal layer remote from the organic light-emissive material.

Further barrier layers and/or gettering layers of the kind discussed above can be provided on the first dielectric layer.

As with the first and second aspects of the present invention, the advantages of the third aspect of the present invention are pronounced when the subject electrode has been deposited by a vacuum evaporation technique.

Hereunder, preferred embodiments of the present invention will be described, by way of example only, with reference to the accompanying drawings in which:-

Figure 1 is a schematic cross-sectional view of an organic light-emitting device according to a first embodiment of the present invention.

Figure 2 is a schematic cross-sectional view of an organic light-emitting device according to a second embodiment of the present invention.

Figure 3 is a schematic cross-sectional view of an organic light-emitting device according to a third embodiment of the present invention.

Figure 4 is a schematic cross-sectional view of an organic light-emitting device according to a fourth embodiment of the present invention.

Figure 5 is a schematic cross-sectional view of an organic light-emitting device according to a fifth embodiment of the present invention.

Figure 6 is a schematic cross-sectional view of an organic light-emitting device according to a sixth embodiment of the present invention.

Figure 7 is a schematic cross-sectional view of an organic light-emitting device according to a seventh embodiment of the present invention.

An organic light-emitting device according to a first embodiment of the present invention is shown in Figure 1. The device comprises a first electrode layer 4, in this case an anode layer comprised of indium tin oxide (ITO) formed on a substrate 2. The substrate may, for example, be one made of glass or a flexible plastic

substrate or may be a glass-plastic laminate. A first thin film 6 of a light-emissive organic material (in this case, poly(phenylenevinylene) (PPV)) is formed on the ITO layer 4. This organic PPV layer can be formed by spin-coating a precursor to PPV in a suitable solvent onto the ITO layer and then heating the spin-coated layer to convert the precursor to the polymer PPV. A second thin film 8 of an organic material (such as MEH-PPV) is formed on the first thin film of light-emissive organic material 6. This second thin film 8 can, for example, be formed in the same general manner as the first thin film 6 of light-emissive organic material. The second thin film of organic material may serve as a light-emissive layer or a charge transport layer or have some other purpose. Further light-emissive organic layers can be provided.

Alternatively, layer 6 could be a charge-transport layer such as polyethylenedioxythiophene doped with polystyrene sulphonic acid (PEDT:PSS), or polyaniline and the second thin film 8 may be the light-emissive layer such as a blend of 5% poly(2,7-(9,9-di-n-octylfluorene)-3,6-(benzothiadiazole) with 95% poly(2,7-(9,9-di-n-octylfluorene) (5F8BT), poly(2,7-(9,9-di-n-octylfluorene) (F8), poly(2,7-(9,9-di-n-octylfluorene)-(1,4-phenylene-((4-methylphenyl)imino)-1,4-phenylene-((4-methylphenyl)imino)-1,4-phenylene))/poly(2,7-(9,9-di-n-octylfluorene) (PFM:F8), poly(2,7-(9,9-di-n-octylfluorene)-(1,4-phenylene-((4-methoxyphenyl)imino)-1,4-phenylene-((4-methoxyphenyl)imino)-1,4-phenylene))/poly(2,7-(9,9-di-n-octylfluorene)/poly(2,7-(9,9-di-n-octylfluorene)-(1,4-phenylene-((1,4-phenylene-((4-secbutylphenyl)imino)-1,4-phenylene)) (PFMO:F8:TFB).

A thin layer 10 of calcium having a thickness of 200nm is formed on the second thin film of organic material 8. This calcium layer functions as a cathode and can be formed, for example, by rf sputtering or dc magnetron sputtering (preferably using neon as a discharge gas) or by vacuum evaporation. Vacuum evaporation is the preferred technique because it causes less damage to the underlying organic material than a sputtering technique.

A thick layer of aluminium nitride 12 having a thickness of about 10 microns is formed on the thin layer of calcium 10. This aluminium nitride layer is preferably deposited by sputtering to provide a pinhole-free layer. A conventional sputtering technique such as rf sputtering or dc magnetron sputtering may be employed using a sputter target/cathode made of aluminium and a discharge gas containing nitrogen.

This thick aluminium nitride layer 12 is very impermeable with respect to ambient species such as oxygen and moisture and therefore serves to effectively protect the underlying calcium cathode layer from these reactive species.

An organic light-emitting device according to a second embodiment of the present invention is shown in Figure 2. It is identical to the device shown in Figure 1 except that an additional layer 14 of aluminium having a thickness of 5 microns is provided between the thin calcium layer 10 and the thick layer of aluminium nitride 12 as a second cathode layer. In this case, this intermediate layer of aluminium is formed by vacuum evaporation, but it could alternatively be formed by a sputtering technique for example.

An organic light-emitting device according to a third embodiment of the present invention is shown in Figure 3. It is similar to the device shown in Figure 2 except that a thick layer 16 of aluminium oxide having a thickness of about 10 microns is provided on the thick layer of aluminium nitride 12. This top layer of aluminium oxide is preferably formed by a sputtering technique in order to provide a pinhole-free layer.

An organic light-emitting device according to a fourth embodiment of the present invention is shown in Figure 4. This device is identical to that shown in Figure 2 except that a second layer of calcium 18 having a thickness of about 5 microns is provided between the aluminium layer 14 and the aluminium nitride layer 12. This second calcium layer is provided to getter any reactive species which may somehow manage to permeate through the overlying aluminium nitride and thus

provide protection for the underlying cathode. This second layer of calcium 18 is preferably deposited by a sputtering technique in order to provide a pinhole-free layer.

An organic light-emitting device according to a fifth embodiment of the present invention is shown in Figure 5. This device is similar to that shown in Figure 4 except that a sputtered layer of aluminium 20 having a thickness of about 10 microns is provided between the evaporated aluminium layer 14 and the second layer of calcium 18 as an additional barrier layer. According to a further variation as shown in Figure 6, a further sputtered layer of aluminium is provided between the second calcium layer 18 and the aluminium nitride layer 12.

An organic light-emissive device according to a seventh embodiment of the present invention is shown in Figure 7. This is similar to the device shown in Figure 3, except that the Ca/Al two-layer cathode is capped with a 1000 Angstrom layer 24 of SiO deposited by thermal evaporation from a high temperature ceramic boat and a 10 micron layer 26 of aluminium nitride deposited by sputtering. The protective SiO/AlN two-layer cap employed in this embodiment provides excellent cathode protection. It is thought that this is due to the fact that the SiO layer not only acts as a physical barrier but also acts as a gettering layer by reacting with moisture.

Although, the devices described above all demonstrate the application of the present invention to the protection of a cathode, the present invention can equally be applied to the protection of the anode, or both the anode and the cathode.

CLAIMS

1. An organic light-emitting device comprising a layer of light-emissive organic material interposed between a first electrode and a second electrode, at least one of the first and second electrodes comprising one or more electrode layers on the layer of light-emissive organic material for injecting charge carriers into the light-emissive organic material, wherein the organic light-emitting device further comprises a layer of dielectric material on the surface of the outermost electrode layer remote from the layer of light-emissive organic material .
2. An organic light-emitting device according to claim 1 wherein the dielectric material is selected from the group consisting of SiO, AlN, SiO₂, Si₃N₄ and Al₂O₃.
3. An organic light-emitting device according to claim 2 wherein the dielectric material is AlN.
4. An organic light-emitting device according to any preceding claim, wherein the thickness of the dielectric layer is in the range of 0.01 to 10 microns.
5. An organic light-emitting device according to claim 1 further comprising at least a second layer of dielectric material on the first layer of dielectric material, the thickness of the layers being selected so as to reduce mechanical stress on the cathode.
6. An organic light-emitting device according to claim 5 wherein the first and second layers of dielectric material comprise layers of different dielectric materials.
7. An organic light-emitting device according to claim 5 or claim 6 wherein the first and second layers of dielectric material comprise layers of materials selected from the group consisting of AlN, SiO₂, Si₃N₄ and Al₂O₃.
8. An organic light emitting device according to claim 5 wherein the first layer of dielectric material is a layer of AlN and the second layer of dielectric material is a layer of Al₂O₃.

9. An organic light-emitting device according any of claims 5 to 8 wherein the first and second layers of dielectric material each have thicknesses in the range of 0.01 to 10 microns
10. An organic light emitting device comprising at least one layer of a light-emissive organic material interposed between a first electrode and a second electrode, at least one of the first and second electrodes comprising one or more electrode layers on the light-emissive material for injecting charge carriers into the light-emissive material; wherein the organic light-emitting device further has a stack comprising a first inert barrier layer and at least one gettering layer interposed between the outermost electrode layer and the first inert barrier layer for absorbing moisture and oxygen.
11. An organic light-emitting device according to claim 10 wherein the first inert barrier layer is a layer of a material selected from the group consisting of AlN, Al₂O₃, SiO₂ and Si₃N₄, and is preferably a layer of AlN.
12. An organic light-emitting device according to claim 10 wherein the first inert barrier layer has a thickness in the range of 0.01 to 10 microns.
13. An organic light-emitting device according to claim 1 wherein the stack further comprises a second inert barrier layer interposed between the gettering layer and the surface of the outermost electrode layer remote from the layer of light-emissive organic material.
14. An organic light-emitting device according to claim 13 wherein the second inert barrier layer is a layer of sputtered aluminium and the first inert barrier layer is a layer of AlN.
15. An organic light-emitting device according to claim 13 wherein the first and second inert barrier layers each have a thickness in the range of 0.01 to 10 microns.
16. An organic light-emitting device according to any of claims 10 to 15 wherein the gettering layer is a layer of a reactive metal or metal alloy, or a hygroscopic oxide.
17. An organic light-emitting device according to claim 16 wherein the gettering layer is a layer of BaO.

18. An organic light-emitting device according to claim 16 wherein the gettering layer is a layer of a material selected from the group consisting of Li, Ca, LiAl, Ba and Cs.
19. An organic light-emitting device according to claim 18 wherein the gettering layer is a layer of Ca.
20. An organic light-emitting device according to any of claims 10 to 19 wherein the thickness of the gettering layer is in the range of 0.01 to 5 microns.
21. An organic light emitting device according to claim 10 wherein at least one of the first and second electrodes is a multi-layered electrode comprising a first low work function conductive layer on the layer of light-emissive organic material and a second conductive layer on the surface of the first low work function conductive layer remote from the layer of light-emissive organic material.
22. An organic light-emitting device according to claim 21 wherein the first low work function conductive layer is an evaporated layer of calcium having a thickness of 200nm or less, and the second conductive layer is a layer of evaporated aluminium having a thickness of 5 microns or less.
23. A method of providing a protective cap on a first electrode of an organic light-emitting device comprising at least one layer of a light-emissive organic material between first and second electrodes for injecting charge carriers into the light-emissive organic material, said method comprising the step of forming a first layer of a dielectric material on the surface of the first electrode opposite the layer of light-emissive organic material by a vacuum evaporation technique.
24. A method according to claim 23 further comprising the step of forming a second layer of a dielectric material on the surface of the first layer of the dielectric material opposite the first electrode.
25. A method according to claim 23 or claim 24 wherein the first layer of dielectric material comprises a layer of silicon monoxide.
26. A method according to any of claims 23 to 25 wherein the first layer of dielectric material has a thickness in the range of 10 to 10,000 Angstroms.

27. A method according to claim 26 wherein the first layer of dielectric material has a thickness in the range of 100 to 2000 Angstroms.
28. A method according to claim 27 wherein the first layer of dielectric material has a thickness in the range of about 1000 Angstroms.
29. A method according to claim 24 wherein the second layer of dielectric material is formed by a sputtering technique.
30. A method according to claim 24 wherein the second layer of dielectric material comprises a layer of a material selected from the group consisting of AlN, SiO₂, Si₃N₄ and Al₂O₃.
31. An organic light-emitting device produced by a method according to any one of claims 23 to 30.
32. An organic light-emitting device substantially as hereinbefore described with reference to the accompanying drawings.

ABSTRACT

ORGANIC LIGHT-EMITTING DEVICES

An organic light-emitting device comprising a layer of light-emissive organic material interposed between a first electrode and a second electrode, at least one of the first and second electrodes comprising one or more electrode layers on the layer of light-emissive organic material for injecting charge carriers into the light-emissive organic material, wherein the organic light-emitting device further comprises a layer of dielectric material on the surface of the outermost electrode layer remote from the layer of light-emissive organic material .

1/2

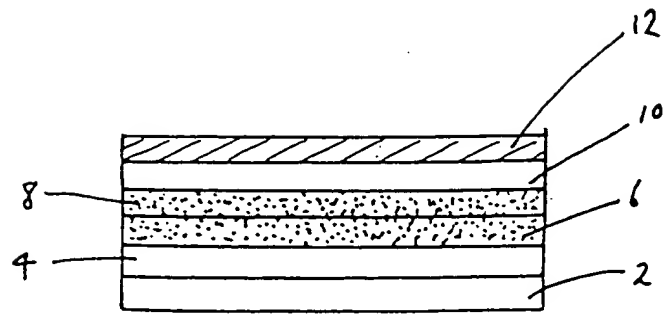


FIG. 1

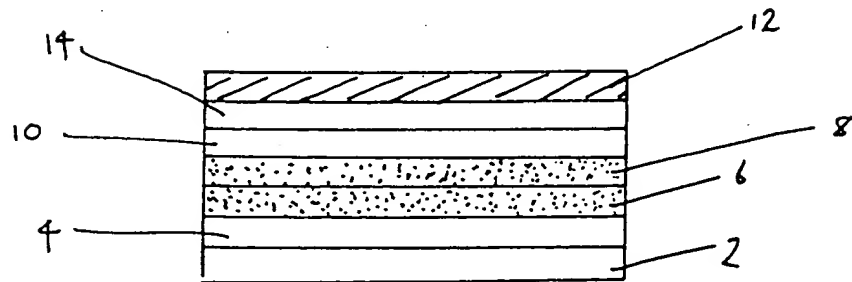


FIG. 2

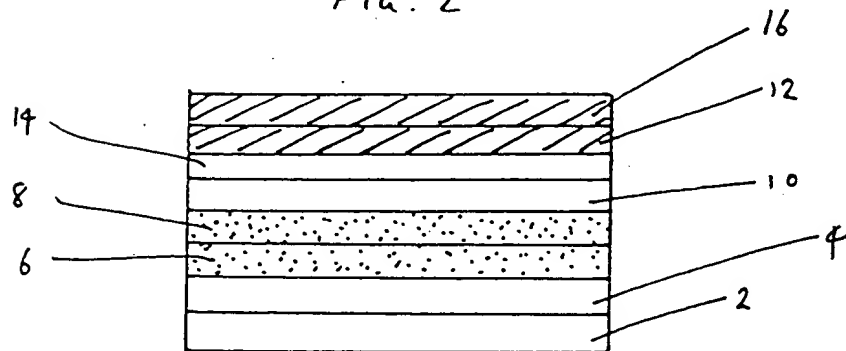


FIG. 3

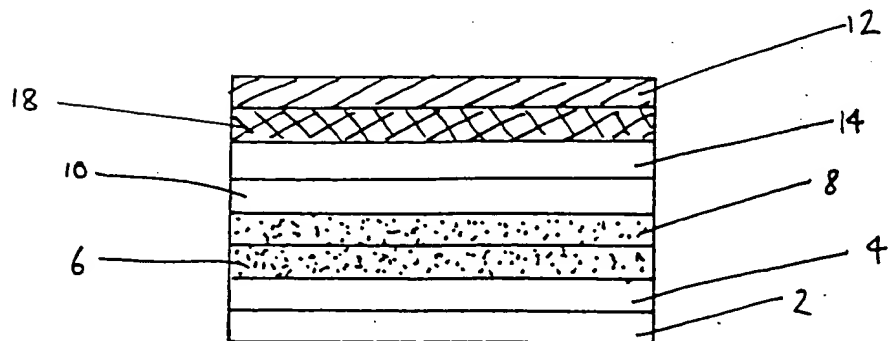


FIG. 4

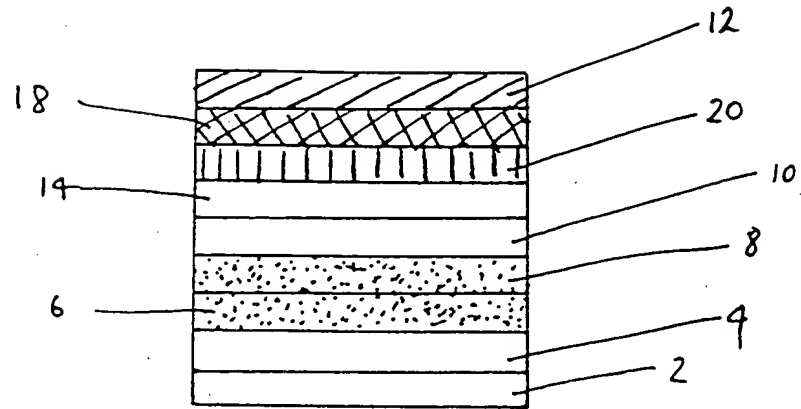


FIG. 5

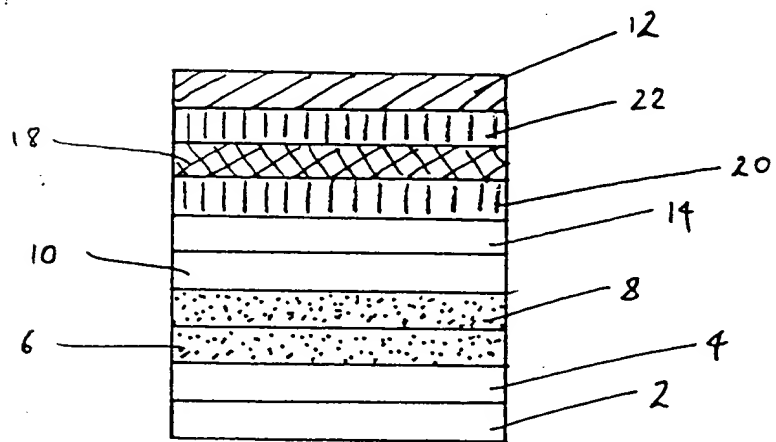


FIG. 6

PCT/GB99/04144

Cambridge Disp. Technology Ltd.

14.12.99